



VRFC

VALVOLA DI STROZZAMENTO REGOLABILE (TENUTA A CONO)
ADJUSTABLE THROTTLE-CHECK VALVE (POPPET TYPE)

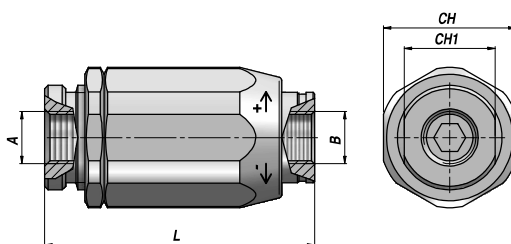

Codice Code	A BSP	B BSP	Q MAX l/min A>B	Q MAX l/min B>A	P MAX bar	Tipo Type	L	CH	CH1	kg
VSG512.100000	1/4"	1/4"	30	30	350	VRFC 010	66.0	32	22	0,30
VSG512.200000	3/8"	3/8"	40	50	350	VRFC 020	77.5	38	26	0,48
VSG512.300000	1/2"	1/2"	50	80	350	VRFC 030	83.0	41	30	0,59
VSG512.400000	3/4"	3/4"	80	110	300	VRFC 040	104.0	55	38	1,34
VSG512.500000	1"	1"	110	160	250	VRFC 050	118.5	65	46	2,15
VSG512.600000	1"1/4	1"1/4	150	210	230	VRFC 060	135.0	80	55	3,31
VSG512.700000	1"1/2	1"1/2	210	280	230	VRFC 070	149.5	90	62	4,76



MATERIALE CORPO : ACCIAIO
BODY MATERIAL : STEEL

MONTAGGIO IN LINEA
LINE MOUNTING

UNIDIREZIONALE
UNIDIRECTIONAL

VRB

VALVOLA DI STROZZAMENTO REGOLABILE
ADJUSTABLE THROTTLE VALVE

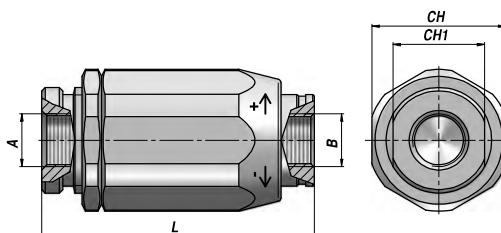

Codice Code	A BSP	B BSP	Q MAX l/min	P MAX bar	Tipo Type	L	CH	CH1	kg
VSG515.100000	1/4"	1/4"	30	350	VRB 010	66.0	32	22	0,30
VSG515.200000	3/8"	3/8"	45	350	VRB 020	77.5	38	26	0,48
VSG515.300000	1/2"	1/2"	70	350	VRB 030	83.0	41	30	0,59
VSG515.400000	3/4"	3/4"	100	300	VRB 040	104.0	55	38	1,34
VSG515.500000	1"	1"	150	250	VRB 050	118.5	60	46	2,15

MATERIALE CORPO : ACCIAIO
BODY MATERIAL : STEEL

MONTAGGIO IN LINEA
LINE MOUNTING

BIDIREZIONALE
BIDIRECTIONAL