

FERRULE

M03500


**NO SKIVE FERRULE
FOR WIRE SPIRAL HOSES**

FITTINGS

116

| PART. REF. | HOSE BORE | | | DIMENSIONS mm | | | | | | | |
|------------|-----------|------|--------|---------------|------|--|--|--|--|--|--|
| | DN | Dash | inch | D | L | | | | | | |
| M03500-06 | 10 | - 6 | 3/8" | 29.5 | 30.7 | | | | | | |
| M03500-08 | 12 | - 8 | 1/2" | 33.4 | 32.0 | | | | | | |
| M03500-10 | 16 | - 10 | 5/8" | 37.2 | 34.8 | | | | | | |
| M03500-12 | 19 | - 12 | 3/4" | 41.3 | 40.0 | | | | | | |
| M03500-16 | 25 | - 16 | 1" | 49.1 | 51.0 | | | | | | |
| M03500-20 | 31 | - 20 | 1.1/4" | 59.3 | 54.5 | | | | | | |

BS STANDARD CONNECTIONS

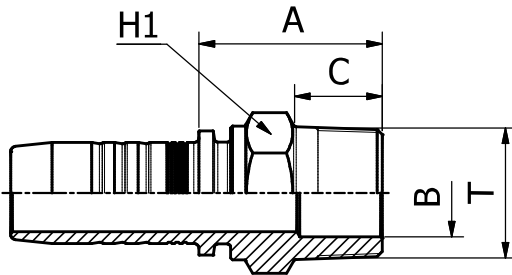


M10710

BSP MALE TAPERED - ISO 7

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | | | |
|--------------|-----------|------|--------|-------------|---------------|------|------|------|--|--|--|
| | DN | Dash | inch | T | B | A | C | H1 | | | |
| M10710-03-02 | 5 | - 3 | 3/16" | 1/8" - 28 | 4.5 | 20.5 | 8.0 | 12.0 | | | |
| M10710-03-04 | 5 | - 3 | 3/16" | 1/4" - 19 | 4.5 | 24.5 | 12.0 | 14.0 | | | |
| M10710-04-02 | 6 | - 4 | 1/4" | 1/8" - 28 | 4.5 | 21.0 | 8.0 | 12.0 | | | |
| M10710-04-04 | 6 | - 4 | 1/4" | 1/4" - 19 | 4.5 | 25.0 | 12.0 | 14.0 | | | |
| M10710-04-06 | 6 | - 4 | 1/4" | 3/8" - 19 | 7.0 | 26.0 | 12.0 | 19.0 | | | |
| M10710-04-08 | 6 | - 4 | 1/4" | 1/2" - 14 | 10.0 | 29.5 | 15.0 | 22.0 | | | |
| M10710-05-04 | 8 | - 5 | 5/16" | 1/4" - 19 | 5.5 | 25.0 | 12.0 | 14.0 | | | |
| M10710-05-06 | 8 | - 5 | 5/16" | 3/8" - 19 | 7.0 | 26.5 | 12.0 | 19.0 | | | |
| M10710-05-08 | 8 | - 5 | 5/16" | 1/2" - 14 | 10.0 | 30.0 | 15.0 | 22.0 | | | |
| M10710-06-06 | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 27.0 | 12.0 | 19.0 | | | |
| M10710-06-08 | 10 | - 6 | 3/8" | 1/2" - 14 | 10.0 | 30.5 | 15.0 | 22.0 | | | |
| M10710-08-04 | 12 | - 8 | 1/2" | 1/4" - 19 | 4.5 | 26.0 | 12.0 | 19.0 | | | |
| M10710-08-08 | 12 | - 8 | 1/2" | 1/2" - 14 | 10.0 | 31.0 | 15.0 | 22.0 | | | |
| M10710-10-08 | 16 | - 10 | 5/8" | 1/2" - 14 | 10.0 | 31.0 | 15.0 | 22.0 | | | |
| M10710-10-12 | 16 | - 10 | 5/8" | 3/4" - 14 | 17.0 | 34.0 | 17.0 | 27.0 | | | |
| M10710-12-12 | 19 | - 12 | 3/4" | 3/4" - 14 | 17.0 | 35.5 | 17.0 | 27.0 | | | |
| M10710-16-12 | 25 | - 16 | 1" | 3/4" - 14 | 17.0 | 38.0 | 17.0 | 32.0 | | | |
| M10710-16-16 | 25 | - 16 | 1" | 1" - 11 | 22.5 | 42.0 | 21.0 | 36.0 | | | |
| M10710-20-20 | 31 | - 20 | 1.1/4" | 1.1/4" - 11 | 28.5 | 47.5 | 23.0 | 46.0 | | | |
| M10710-24-24 | 38 | - 24 | 1.1/2" | 1.1/2" - 11 | 32.0 | 50.0 | 23.0 | 50.0 | | | |
| M10710-32-32 | 51 | - 32 | 2" | 2" - 11 | 44.0 | 55.5 | 27.0 | 65.0 | | | |

BS STANDARD CONNECTIONS

M10510

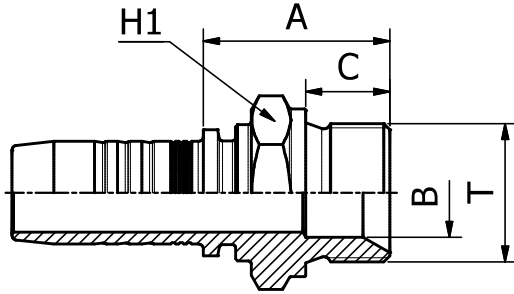


**BSP MALE PARALLEL 60° CONE SEAT
BS5200 / ISO 8434-6**

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | |
|--------------|-----------|------|--------|-------------|---------------|------|------|------|------|
| | DN | Dash | inch | | T | B | A | C | H1 |
| M10510-03-02 | 5 | - 3 | 3/16" | 1/8" - 28 | | 3.5 | 22.5 | 10.0 | 14.0 |
| M10510-03-04 | 5 | - 3 | 3/16" | 1/4" - 19 | | 5.0 | 25.0 | 11.0 | 19.0 |
| M10510-04-02 | 6 | - 4 | 1/4" | 1/8" - 28 | | 3.5 | 22.5 | 10.0 | 14.0 |
| M10510-04-04 | 6 | - 4 | 1/4" | 1/4" - 19 | | 5.0 | 25.5 | 11.0 | 19.0 |
| M10510-04-06 | 6 | - 4 | 1/4" | 3/8" - 19 | | 8.0 | 27.0 | 12.0 | 22.0 |
| M10510-04-08 | 6 | - 4 | 1/4" | 1/2" - 14 | | 11.0 | 30.0 | 14.0 | 27.0 |
| M10510-05-04 | 8 | - 5 | 5/16" | 1/4" - 19 | | 5.0 | 26.0 | 11.0 | 19.0 |
| M10510-05-06 | 8 | - 5 | 5/16" | 3/8" - 19 | | 8.0 | 27.5 | 12.0 | 22.0 |
| M10510-06-04 | 10 | - 6 | 3/8" | 1/4" - 19 | | 5.0 | 26.0 | 11.0 | 19.0 |
| M10510-06-06 | 10 | - 6 | 3/8" | 3/8" - 19 | | 8.0 | 28.0 | 12.0 | 22.0 |
| M10510-06-08 | 10 | - 6 | 3/8" | 1/2" - 14 | | 11.0 | 30.5 | 14.0 | 27.0 |
| M10510-08-06 | 12 | - 8 | 1/2" | 3/8" - 19 | | 8.0 | 28.0 | 12.0 | 22.0 |
| M10510-08-08 | 12 | - 8 | 1/2" | 1/2" - 14 | | 11.0 | 31.0 | 14.0 | 27.0 |
| M10510-08-10 | 12 | - 8 | 1/2" | 5/8" - 14 | | 14.5 | 33.0 | 16.0 | 30.0 |
| M10510-08-12 | 12 | - 8 | 1/2" | 3/4" - 14 | | 17.0 | 34.0 | 16.0 | 32.0 |
| M10510-10-10 | 16 | - 10 | 5/8" | 5/8" - 14 | | 14.5 | 33.0 | 16.0 | 30.0 |
| M10510-10-12 | 16 | - 10 | 5/8" | 3/4" - 14 | | 17.0 | 35.5 | 16.0 | 32.0 |
| M10510-12-08 | 19 | - 12 | 3/4" | 1/2" - 14 | | 11.0 | 32.0 | 14.0 | 27.0 |
| M10510-12-12 | 19 | - 12 | 3/4" | 3/4" - 14 | | 17.0 | 35.5 | 16.0 | 32.0 |
| M10510-12-16 | 19 | - 12 | 3/4" | 1" - 11 | | 22.5 | 39.5 | 19.0 | 41.0 |
| M10510-16-12 | 25 | - 16 | 1" | 3/4" - 14 | | 17.0 | 36.5 | 16.0 | 32.0 |
| M10510-16-16 | 25 | - 16 | 1" | 1" - 11 | | 22.5 | 41.0 | 19.0 | 41.0 |
| M10510-16-20 | 25 | - 16 | 1" | 1.1/4" - 11 | | 28.5 | 45.0 | 20.0 | 50.0 |
| M10510-20-20 | 31 | - 20 | 1.1/4" | 1.1/4" - 11 | | 28.5 | 46.5 | 20.0 | 50.0 |
| M10510-20-24 | 31 | - 20 | 1.1/4" | 1.1/2" - 11 | | 33.5 | 48.5 | 22.0 | 55.0 |
| M10510-24-24 | 38 | - 24 | 1.1/2" | 1.1/2" - 11 | | 33.5 | 49.5 | 22.0 | 55.0 |
| M10510-32-32 | 51 | - 32 | 2" | 2" - 11 | | 46.0 | 54.0 | 25.0 | 70.0 |

BS STANDARD CONNECTIONS

M20512/M20513

BSP FEMALE 60° CONE
BS5200 / ISO 12151-6

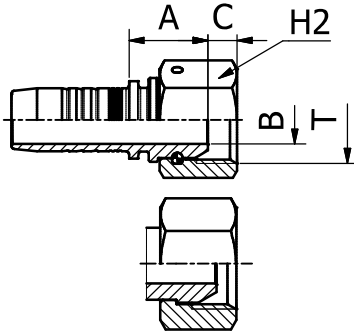


FITTINGS 118

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | |
|--------------|-----------|------|-------|-----------|---------------|------|------|------|
| | DN | Dash | inch | | T | B | A | C |
| M20512-03-02 | 5 | -3 | 3/16" | 1/8" - 28 | 3.0 | 16.0 | 4.4 | 14.0 |
| M20512-04-02 | 6 | -4 | 1/4" | 1/8" - 28 | 3.1 | 16.5 | 4.4 | 14.0 |
| M20512-05-04 | 8 | -5 | 5/16" | 1/4" - 19 | 4.1 | 17.5 | 4.2 | 19.0 |
| M20512-06-04 | 10 | -6 | 3/8" | 1/4" - 19 | 4.1 | 18.0 | 4.2 | 19.0 |
| M20512-08-06 | 12 | -8 | 1/2" | 3/8" - 19 | 7.1 | 21.0 | 6.0 | 22.0 |
| M20512-08-10 | 12 | -8 | 1/2" | 5/8" - 14 | 12.1 | 22.0 | 10.2 | 28.0 |
| M20512-08-12 | 12 | -8 | 1/2" | 3/4" - 14 | 15.0 | 24.5 | 9.0 | 32.0 |
| M20512-10-08 | 16 | -10 | 5/8" | 1/2" - 14 | 9.8 | 24.0 | 6.5 | 27.0 |
| M20512-10-10 | 16 | -10 | 5/8" | 5/8" - 14 | 12.5 | 21.5 | 10.2 | 28.0 |
| M20512-10-12 | 16 | -10 | 5/8" | 3/4" - 14 | 15.0 | 23.0 | 9.0 | 32.0 |
| M20512-12-08 | 19 | -12 | 3/4" | 1/2" - 14 | 9.8 | 25.0 | 6.5 | 27.0 |
| M20512-12-12 | 19 | -12 | 3/4" | 3/4" - 14 | 15.0 | 24.5 | 9.0 | 32.0 |
| M20512-12-16 | 19 | -12 | 3/4" | 1" - 11 | 19.8 | 26.0 | 10.5 | 38.0 |
| M20512-16-12 | 25 | -16 | 1" | 3/4" - 14 | 15.0 | 25.5 | 9.0 | 32.0 |
| M20512-16-16 | 25 | -16 | 1" | 1" - 11 | 19.8 | 27.5 | 10.5 | 38.0 |
| M20513-03-04 | 5 | -3 | 3/16" | 1/4" - 19 | 4.0 | 16.5 | 5.4 | 19.0 |
| M20513-04-04 | 6 | -4 | 1/4" | 1/4" - 19 | 4.0 | 17.0 | 5.4 | 19.0 |
| M20513-04-06 | 6 | -4 | 1/4" | 3/8" - 19 | 7.0 | 19.0 | 6.0 | 22.0 |
| M20513-04-08 | 6 | -4 | 1/4" | 1/2" - 14 | 9.5 | 19.5 | 6.3 | 27.0 |
| M20513-05-06 | 8 | -5 | 5/16" | 3/8" - 19 | 7.0 | 19.0 | 6.0 | 22.0 |
| M20513-05-08 | 8 | -5 | 5/16" | 1/2" - 14 | 9.3 | 20.5 | 6.3 | 27.0 |
| M20513-06-06 | 10 | -6 | 3/8" | 3/8" - 19 | 7.0 | 19.5 | 6.0 | 22.0 |
| M20513-06-08 | 10 | -6 | 3/8" | 1/2" - 14 | 9.3 | 20.0 | 6.3 | 27.0 |
| M20513-08-08 | 12 | -8 | 1/2" | 1/2" - 14 | 9.3 | 20.5 | 6.3 | 27.0 |

BS STANDARD CONNECTIONS

M20511KR

BSP FEMALE 60° CONE
BS5200 / ISO 12151-6

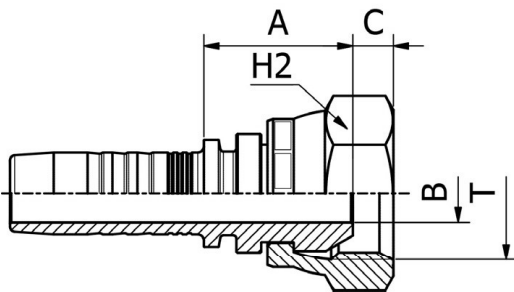


| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | |
|----------------|-----------|------|------|-----------|---------------|------|-----|------|
| | DN | Dash | inch | | T | B | A | C |
| M20511-04-04KR | 6 | -4 | 1/4" | 1/4" - 19 | 4.0 | 20.0 | 5.2 | 19.0 |
| M20511-06-06KR | 10 | -6 | 3/8" | 3/8" - 19 | 7.0 | 22.0 | 6.0 | 22.0 |
| M20511-08-08KR | 12 | -8 | 1/2" | 1/2" - 14 | 9.3 | 24.0 | 6.5 | 27.0 |

BS STANDARD CONNECTIONS

M20514

**BSP FEMALE 60° CONE
BS5200 / ISO 12151-6**

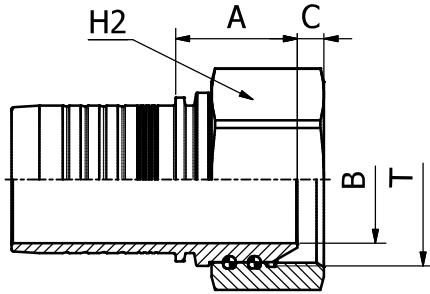


| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | | | | |
|--------------|-----------|------|--------|--------|---------------|------|------|-------|----|--|--|--|
| | DN | Dash | inch | | T | B | A | C | H2 | | | |
| M20514-40-40 | 63 | - 40 | 2.1/2" | 2.1/2" | 55.4 | 52.5 | 11.5 | 85.0 | | | | |
| M20514-48-48 | 76 | - 48 | 3" | 3" | 65.0 | 57.0 | 10.9 | 100.0 | | | | |

BS STANDARD CONNECTIONS


M20542/M20543

**45° BSP FEMALE SWEPT ELBOW 60° CONE
BS5200 / ISO 12151-6**

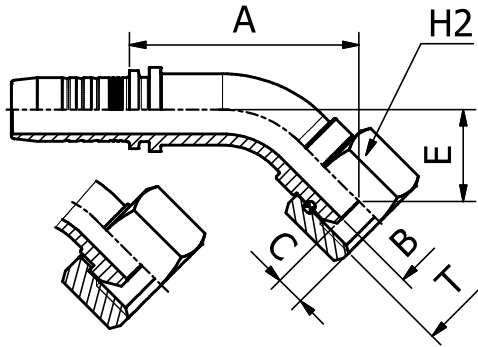

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | | | | |
|--------------|-----------|------|-------|-----------|---------------|------|------|------|------|----|--|--|
| | DN | Dash | inch | | T | B | A | C | E | H2 | | |
| M20542-03-02 | 5 | - 3 | 3/16" | 1/8" - 28 | 3.0 | 31.0 | 4.4 | 15.0 | 14.0 | | | |
| M20542-04-02 | 6 | - 4 | 1/4" | 1/8" - 28 | 3.1 | 35.5 | 4.4 | 14.5 | 14.0 | | | |
| M20542-05-04 | 8 | - 5 | 5/16" | 1/4" - 19 | 4.0 | 35.5 | 4.1 | 16.0 | 19.0 | | | |
| M20542-08-06 | 12 | - 8 | 1/2" | 3/8" - 19 | 7.1 | 52.0 | 6.0 | 20.0 | 22.0 | | | |
| M20542-08-10 | 12 | - 8 | 1/2" | 5/8" - 14 | 12.1 | 54.5 | 10.2 | 22.5 | 28.0 | | | |
| M20542-08-12 | 12 | - 8 | 1/2" | 3/4" - 14 | 15.0 | 57.0 | 9.0 | 25.0 | 32.0 | | | |
| M20542-10-08 | 16 | - 10 | 5/8" | 1/2" - 14 | 9.3 | 63.5 | 6.5 | 26.5 | 27.0 | | | |
| M20542-10-10 | 16 | - 10 | 5/8" | 5/8" - 14 | 12.5 | 63.0 | 10.2 | 26.0 | 28.0 | | | |
| M20542-10-12 | 16 | - 10 | 5/8" | 3/4" - 14 | 15.0 | 64.0 | 9.0 | 27.0 | 32.0 | | | |
| M20542-12-08 | 19 | - 12 | 3/4" | 1/2" - 14 | 9.3 | 55.5 | 6.5 | 22.5 | 27.0 | | | |
| M20542-12-12 | 19 | - 12 | 3/4" | 3/4" - 14 | 15.0 | 70.5 | 9.0 | 28.5 | 32.0 | | | |
| M20542-12-16 | 19 | - 12 | 3/4" | 1" - 11 | 19.8 | 72.5 | 10.5 | 30.0 | 38.0 | | | |
| M20542-16-16 | 25 | - 16 | 1" | 1" - 11 | 19.8 | 91.0 | 10.5 | 36.5 | 38.0 | | | |
| M20543-03-04 | 5 | - 3 | 3/16" | 1/4" - 19 | 4.0 | 35.5 | 5.4 | 14.5 | 19.0 | | | |
| M20543-04-04 | 6 | - 4 | 1/4" | 1/4" - 19 | 4.0 | 36.0 | 5.4 | 15.0 | 19.0 | | | |
| M20543-04-06 | 6 | - 4 | 1/4" | 3/8" - 19 | 7.0 | 37.5 | 6.0 | 16.0 | 22.0 | | | |
| M20543-05-06 | 8 | - 5 | 5/16" | 3/8" - 19 | 7.0 | 38.0 | 6.0 | 13.5 | 22.0 | | | |
| M20543-06-06 | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 42.0 | 6.0 | 15.5 | 22.0 | | | |
| M20543-06-08 | 10 | - 6 | 3/8" | 1/2" - 14 | 9.3 | 42.5 | 6.3 | 16.0 | 27.0 | | | |
| M20543-08-08 | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 49.5 | 6.3 | 17.0 | 27.0 | | | |

BS STANDARD CONNECTIONS

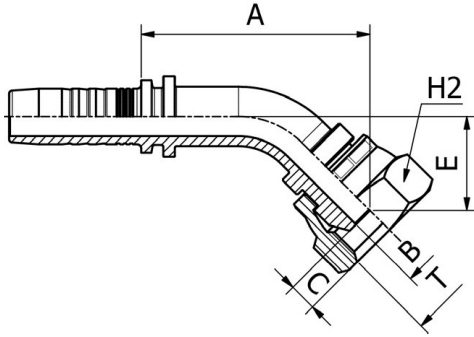


M20541KR

45° BSP FEMALE SWEPT ELBOW 60° CONE
BS5200 / ISO 12151-6

FITTINGS

120

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | | | |
|----------------|-----------|------|------|-----------|---------------|------|-----|------|------|----|--|
| | DN | Dash | inch | | T | B | A | C | E | H2 | |
| M20541-04-04KR | 6 | - 4 | 1/4" | 1/4" - 19 | 4.2 | 38.0 | 5.2 | 16.6 | 19.0 | | |
| M20541-06-06KR | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 45.5 | 6.0 | 20.0 | 22.0 | | |
| M20541-08-08KR | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 54.0 | 6.5 | 22.0 | 27.0 | | |

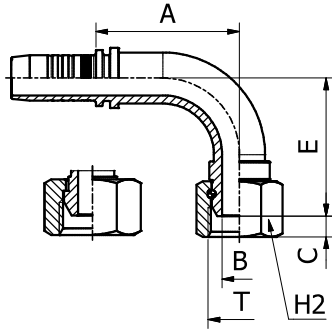


BS STANDARD CONNECTIONS

M20592/M20593

90° BSP FEMALE SWEPT ELBOW
60° CONE - BS5200 / ISO 12151-6

| PART. REF. | HOSE BORE | | | Thread | DIMENSIONS mm | | | | | | |
|--------------|-----------|------|-------|-----------|---------------|------|------|------|------|----|--|
| | DN | Dash | inch | | T | B | A | C | E | H2 | |
| M20592-03-02 | 5 | - 3 | 3/16" | 1/8" - 28 | 3.0 | 21.5 | 4.4 | 26.0 | 14.0 | | |
| M20592-04-02 | 6 | - 4 | 1/4" | 1/8" - 28 | 3.1 | 28.5 | 4.4 | 27.0 | 14.0 | | |
| M20592-05-04 | 8 | - 5 | 5/16" | 1/4" - 19 | 4.0 | 26.5 | 4.1 | 29.5 | 19.0 | | |
| M20592-06-04 | 10 | - 6 | 3/8" | 1/4" - 19 | 4.0 | 27.0 | 4.1 | 29.5 | 19.0 | | |
| M20592-08-06 | 12 | - 8 | 1/2" | 3/8" - 19 | 7.1 | 45.0 | 6.0 | 41.0 | 22.0 | | |
| M20592-08-10 | 12 | - 8 | 1/2" | 5/8" - 14 | 12.1 | 44.0 | 10.2 | 44.0 | 28.0 | | |
| M20592-08-12 | 12 | - 8 | 1/2" | 3/4" - 14 | 15.0 | 44.0 | 9.0 | 45.5 | 32.0 | | |
| M20592-10-08 | 16 | - 10 | 5/8" | 1/2" - 14 | 9.3 | 53.5 | 6.5 | 54.5 | 27.0 | | |
| M20592-10-10 | 16 | - 10 | 5/8" | 5/8" - 14 | 12.5 | 53.5 | 10.2 | 53.5 | 28.0 | | |
| M20592-10-12 | 16 | - 10 | 5/8" | 3/4" - 14 | 15.0 | 53.5 | 9.0 | 55.0 | 32.0 | | |
| M20592-12-08 | 19 | - 12 | 3/4" | 1/2" - 14 | 9.3 | 45.5 | 6.5 | 44.0 | 27.0 | | |
| M20592-12-12 | 19 | - 12 | 3/4" | 3/4" - 14 | 15.0 | 61.5 | 9.0 | 59.5 | 32.0 | | |
| M20592-12-16 | 19 | - 12 | 3/4" | 1" - 11 | 19.8 | 61.5 | 10.5 | 62.0 | 38.0 | | |
| M20592-16-12 | 25 | - 16 | 1" | 3/4" - 14 | 15.0 | 64.5 | 9.0 | 59.5 | 32.0 | | |
| M20592-16-16 | 25 | - 16 | 1" | 1" - 11 | 19.8 | 79.5 | 10.5 | 76.0 | 38.0 | | |
| M20593-03-04 | 5 | - 3 | 3/16" | 1/4" - 19 | 4.0 | 29.0 | 5.4 | 29.0 | 19.0 | | |
| M20593-04-04 | 6 | - 4 | 1/4" | 1/4" - 19 | 4.0 | 29.5 | 5.4 | 29.0 | 19.0 | | |
| M20593-04-06 | 6 | - 4 | 1/4" | 3/8" - 19 | 7.0 | 29.5 | 6.0 | 31.0 | 22.0 | | |
| M20593-05-06 | 8 | - 5 | 5/16" | 3/8" - 19 | 7.0 | 32.0 | 6.0 | 27.5 | 22.0 | | |
| M20593-05-08 | 8 | - 5 | 5/16" | 1/2" - 14 | 9.3 | 36.5 | 6.3 | 32.0 | 27.0 | | |
| M20593-06-06 | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 36.5 | 6.0 | 31.5 | 22.0 | | |
| M20593-06-08 | 10 | - 6 | 3/8" | 1/2" - 14 | 9.3 | 36.5 | 6.3 | 32.0 | 27.0 | | |
| M20593-08-08 | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 45.0 | 6.3 | 36.5 | 27.0 | | |

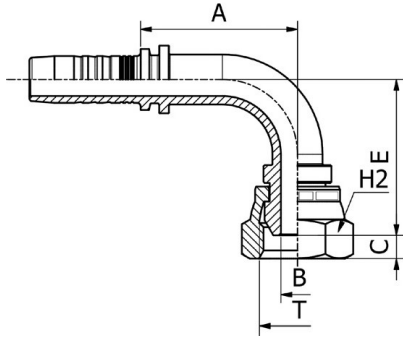


BS STANDARD CONNECTIONS

M20591KR

90° BSP FEMALE SWEPT ELBOW 60° CONE
BS5200 / ISO 12151-6

| PART. REF. | HOSE BORE | | | Thread | T | DIMENSIONS mm | | | | | |
|----------------|-----------|------|------|-----------|-----|---------------|-----|------|------|----|--|
| | DN | Dash | inch | | | B | A | C | E | H2 | |
| M20591-04-04KR | 6 | - 4 | 1/4" | 1/4" - 19 | 4.2 | 28.5 | 5.2 | 30.5 | 19.0 | | |
| M20591-04-06KR | 6 | - 4 | 1/4" | 3/8" - 19 | 7.0 | 28.5 | 6.0 | 32.0 | 22.0 | | |
| M20591-06-06KR | 10 | - 6 | 3/8" | 3/8" - 19 | 7.0 | 35.5 | 6.0 | 37.5 | 22.0 | | |
| M20591-06-08KR | 10 | - 6 | 3/8" | 1/2" - 14 | 9.3 | 35.5 | 6.5 | 39.0 | 27.0 | | |
| M20591-08-06KR | 12 | - 8 | 1/2" | 3/8" - 19 | 7.0 | 44.0 | 6.0 | 42.0 | 22.0 | | |
| M20591-08-08KR | 12 | - 8 | 1/2" | 1/2" - 14 | 9.3 | 44.0 | 6.5 | 43.5 | 27.0 | | |

121 FITTINGS



BS STANDARD CONNECTIONS

M20594

90° BSP FEMALE SWEPT ELBOW 60° CONE
BS5200 / ISO 12151-6

| PART. REF. | HOSE BORE | | | Thread | T | DIMENSIONS mm | | | | | |
|--------------|-----------|------|--------|--------|------|---------------|------|-------|-------|----|--|
| | DN | Dash | inch | | | B | A | C | E | H2 | |
| M20594-40-40 | 63 | - 40 | 2.1/2" | 2.1/2" | 55.4 | 88.0 | 11.5 | 114.0 | 85.0 | | |
| M20594-48-48 | 76 | - 48 | 3" | 3" | 65.0 | 123.0 | 10.9 | 135.0 | 100.0 | | |