



BC442280316180en-000102

Solenoid Operated Directional Valve

DG4V-3-60 Design

В

General Description Solenoid operated directional control valves are for directing and stopping flow at any point in a hydraulic system.

• Efficient control of greater hydraulic powers without increasing solenoid power consumption.

• Installed cost and space savings from higher power/weight-and-size ratios.

• Installation flexibility resulting from choice of numerous combinations of solenoid connectors and locations. • Viton seals as standard for multi-fluid capability. Nitrile seals available as a model code option.

• Higher sustained machine productivity and higher uptime because of proven fatigue life and endurance, tested over 20 million cycles.

 Solenoid coils can be changed quickly and easily without leakage from hydraulic system.

• Compact, cost effective system design when used with Danfoss [°] SystemStak™ valves and subplates. DG4V3-S/R- High Performance and Standard Performance Valves

• Minimum pressure drop 2.5 bar at 30 l/min.


 Range of coil connectors including DIN, Deutsch, AMP and terminal box.

• Range of coil voltages and power options.

• Up to 80 l/min (21 USgpm) and up to 40 l/min (10.5 USgpm) respectively at 350 bar (5000 psi).


• Offers designers the opportunity to select the optimum value package for each application.

• International standard interface. The valve mounting face conforms to ISO 4401, size 03 and is compatible with related international standards.

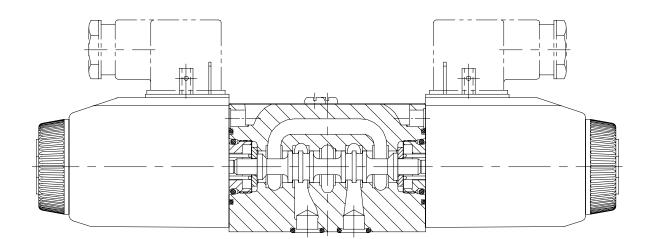

is at port "B" end, indepen-

dent of spool type

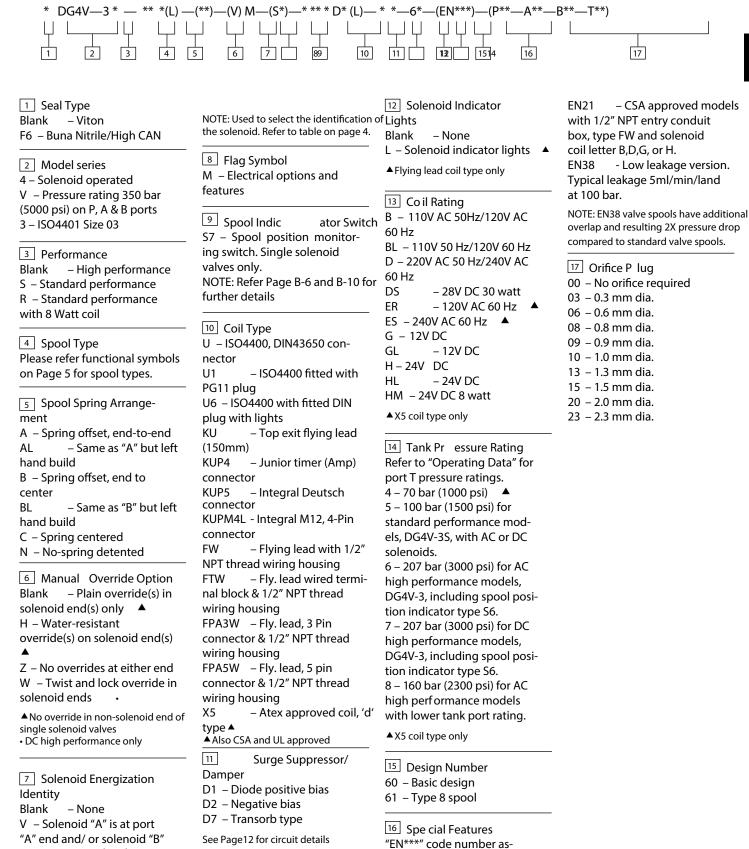

signed as required.


Functional Symbols


Spool Options

The valve function schematics apply to both U.S. and European valves


DG4V-3(S)-*NV














DG4V-3(S)-*BLV

т т

т

0

2

6


22

33


52

11


 DG4V-3(S)-*ALV



DG4V-3(S)-*BLV







Solenoid Identified to US and European Standards

	U .S. Solenoid Standard	Eur opean Solenoid Standard (specify "V" in the model code at position 7 on page 3)
Double solenoid valves, two position, detented	A B Sol. B P ⁺ Sol. TA	
Double solenoid valves, spring centered	A B A A A A A A A A A A A A A A A A A A	A + B - H = H Sol. B P T Sol. A
Single solenoid valves, solenoid at port A end	Sol. B	
Single solenoid valves, solenoid at port B end		

▲ Transient condition only

Operating Data

Feature	DG4V -3	DG4V -3S	DG4V-3R
Pressure Limits			
P, A and B ports	350 bar (5075 psi)	350 bar (5075 psi) 🛛 🗖	350 bar (5075 psi)
T port	210 bar (3045 psi)	100 bar (1450 psi)	210 bar (3045 psi)
Flow rating	See performance data	See performance data	See performance data
Relative duty factor	Continuous; ED = 100%	Continuous; ED = 100%	Continuous; ED = 100%
Type of protection: ISO 4400 coils with plug fitted correctly	IEC 144 class IP65	IEC 144 class IP65	IEC 144 class IP65
Coil winding	Class H	Class H	Class H
Lead wires (coils type F***)	Class H	Class H	Class H
Coil encapsulation	Class F	Class F	Class F
· ·	Permissable voltage fluctuatio	n:	
Maximum	Refer to temperature limits.	Refer to temperature limits.	Refer to temperature limits.
Minimum	90% rated	90% rated	90% rated
Typical response times at 100%	rated volts measured from appli	cation/removal of voltage to full	spool displacement of "2C" spool at:
Flow rate P-A, B-T	40 l/min (10.6 USgpm)	20 l/min (5.3 USgpm)	20 l/min (5.3 Usgpm)
Pressure	175 bar (2537 psi)	175 bar (2537 psi)	175 bar (2527 PSI)
AC (~) energizing	15 ms	18 ms	18 ms
AC (~) de-energizing	23 ms	32 ms	32 ms
DC (=) energizing	45 ms	60 ms	60 ms
DC (=) de-energizing	28 ms	40 ms	40 ms
Power consumption, AC solenoids (for coils listed in model code).	Initial Holding VA (RMS) VA (RMS) ▲	Initial Holding VA (RMS) VA (RMS) ▲	Initial Holding VA (RMS) VA (RMS)
Full power coils: Dual frequency coils at 50 Hz	280 61	280 61	N/A
Dual frequency coils at 60 HZ	300 58	300 58	N/A
Low power coils, "BL" and "DL": (Not available with "N" – No-spring detented models)	Low power coils not usable with DG4V-3S valves.	170 37 N/	A
Dual frequency coils at 50 Hz		190 37	N/A
Dual frequency coils at 60 Hz			N/A
Power consumption, DC solence Full power coils: 12V, model type "G"	bids at rated voltage and 20 C (68	F). 30W –	N/A
24V, model type "H"	30W –	30W –	N/A
Low power coils: 12V, model type "GL"	Low power coils not usable with DG4V-3S valves.	– 18W	N/A
24V, model type "HL"		18W –	N/A

For applications where valves are to remain pressurized (either energized or de-energized) at pressures over 210 bar (3045 psi) without frequent switching, it is recommended to use the high performance model, DG4V-3.

▲ 1st half cycle; armature fully retracted.

Operating Data

Spool Position Indicator Models

Spool/spring arrangement types 0A, 0B, 2A, 2B, 22A, 23A, 35A, 52B, 3B, 6B

DC model type "S7"




Input:

В

input.	
Supply Voltage	20-32 VDC
Reverse Pol. Protection	Yes
	outputs with alternating function - PNP
Output:	
Max output load	<=400mA ; Duty Ratio 100%
Short Circuit Protection	Yes
Hysteresis	<=0.05mm
Electrical connector	M12x1 4-Pole
Thermal shift	<=±0.1mm
Plug connections:	
Pin 1	+ Supply
Pin 2	Normal Closed
Pin 3	0V
Pin 4	Normal Open
EMC	Protection DIN EN 61000-6-1/2/3/4, Aug 2002
Humidity	0-95% rel. (nach DIN 40040)
Protection Class	IP65 DIN 40050
Vibration 0-500Hz	Max. 20g
Shock	Max. 50g

• Factory setting ensures this condition under all combinations of manufacturing tolerance and of temperature drift (see "Temperature limits").

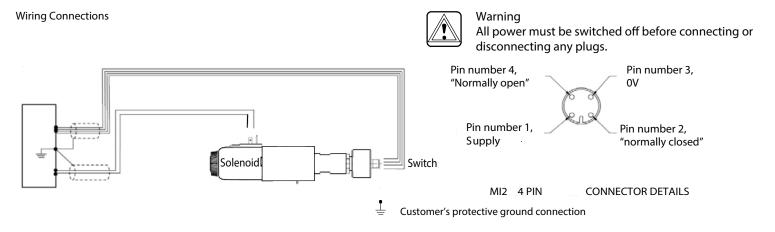




WARNING: Electromagnetic Compatibility (EMC)

It is necessary to ensure that the unit is wired up in accordance with the connection arrangements shown above. For effective protection the user's electrical cabinet, the valve subplate or manifold and the cable screens should be connected to efficient ground points. In all cases both valve and cable should be kept as far away as possible from any sources of electromagnetic radiation such as cables carrying heavy current, relays and certain kinds of portable radio transmitters, etc. Difficult environments could mean that extra screening necessary to avoid the interference.

Performance Data

DG4V-3 models (high performance)

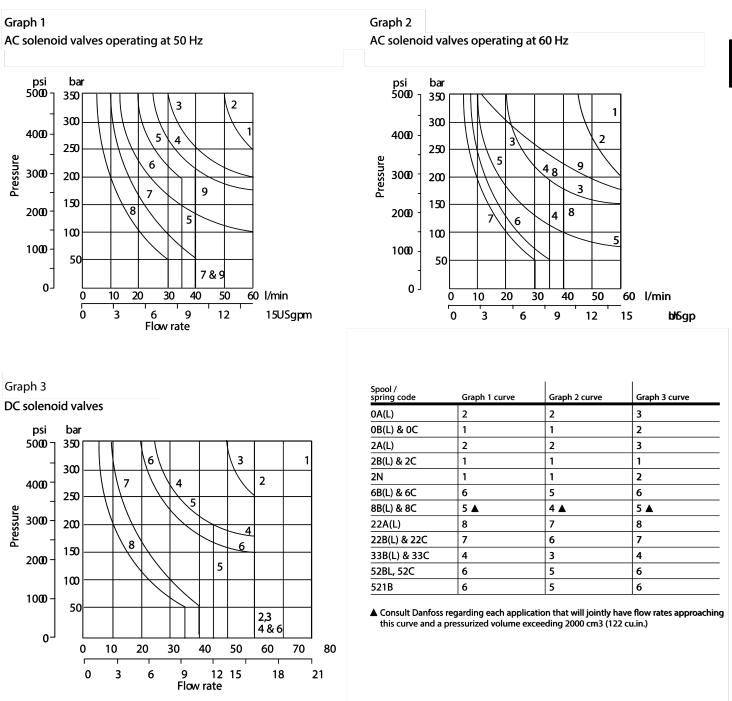

Performance Data

Typical with mineral oil at 36 cSt (168.6 SUS) and a specific gravity of 0.87.

Maximum flow rates

Performance based on full power solenoid coils warm and operating at 90% rated voltage.


See note at bottom of next page when using low power coils (DG4V-3 models only).

В


DG4V-3S models (standard performance)

Graph 4


AC solenoid valves operating at 50 Hz

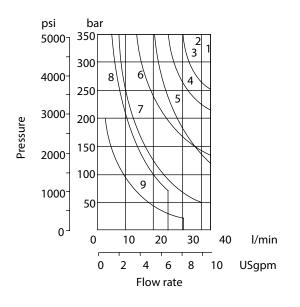

Graph 6 DC solenoid valves

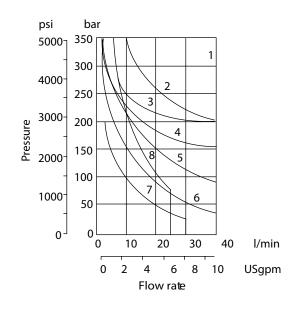

Graph 5 AC solenoid valves operating at 60 Hz

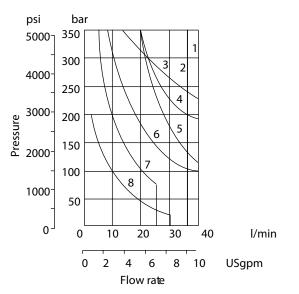


Spool / spring code	Graph 1 curve	Graph 2 curve	Graph 3 curve
0A(L)	1	1	3
0B(L) & 0C	1	1	1
2A(L)	5	5	3
2B(L) & 2C	2	2	3
2N	1	1	1
6B(L) & 6C	6	6	5
8B(L) & 8C	8 🔺	7 🔺	8 🔺
22A(L)	9	8	7
22B(L) & 22C	7	7	6
33B(L) & 33C	4	4	4
52BL, 52C	6	6	5
521B	6	6	5

▲ Consult Danfoss regarding each application that will jointly have flow rates approaching this curve and a pressurized volume exceeding 2000 cm3 (122 cu.in.)

9

Performance Data

Pressure drops

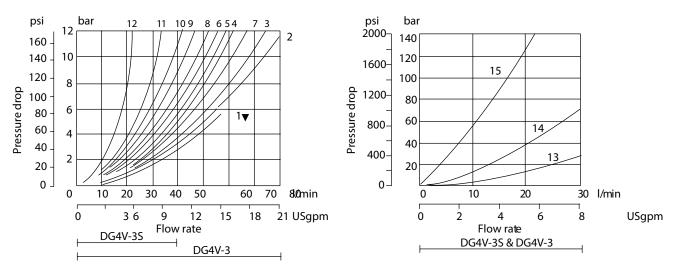

t Curve for spool type 6: not recommended for flows in excess of 60 l/min (15.8 USgpm).

pool / pring code	Spool positions covered	P to A	P to B	A to T	B to T	P to T	B to A or A to B
)A(L)	Both	5	5	2	2	-	-
)B(L) & 0C	De-energized	-	-	-	-	4▲ Δ	-
	Energized	4	4	2	2	-	-
2A(L)	Both	6	6	5	5	-	-
B(L) & 2C	Energized	5	5	2	2	-	-
!N	Both	6	6	3	3	-	-
6B(L) & 6C	De-energized	-	-	3 🔺	3Δ	-	-
	Energized	6	6	1	1	-	-
	Energized	4	4	3 🛦	3	-	-
B(L) & 8C	All	9	9	5	5	3	-
2A(L), 22B(L) & 22C	All	6	6	-	-	-	-
3B(L) & 33C	De-energized	-	-	15 🔺	15 Δ	-	-
	Energized	5	5	2	2	-	-
2BL & 52C	Energized	6 🔺	6Δ	2	-	-	10 O
	Energized	6 🔺	6Δ	2	-	-	10 O
521B	All	6 🔺	6Δ	-	-	-	10 O
	De-energized	-	-	10 🔺	11 Δ	-	10 O
	Energized	6	6Δ	-	-	-	10 🔾

Pressure drops in offset positions except where otherwise indicated

▲ B" plugged Δ "A" plugged \bigcirc "P" plugged


Viscosity cSt (SUS)


14	20	43	54	65	76	85
(71.75)	(97.8)	(200)	(251)	(302)	(352)	(399)
% of ΔP (Approx.)						
81	88	104	111	116	120	124

For other viscosities, pressure drops approximate to:

A change to another specific gravity will yield an approximately proportional change in pressure drop. The specific gravity of a fluid may be obtained from its producer. Fire resistant fluids usually have higher specific gravities than oil.

Installation Dimension

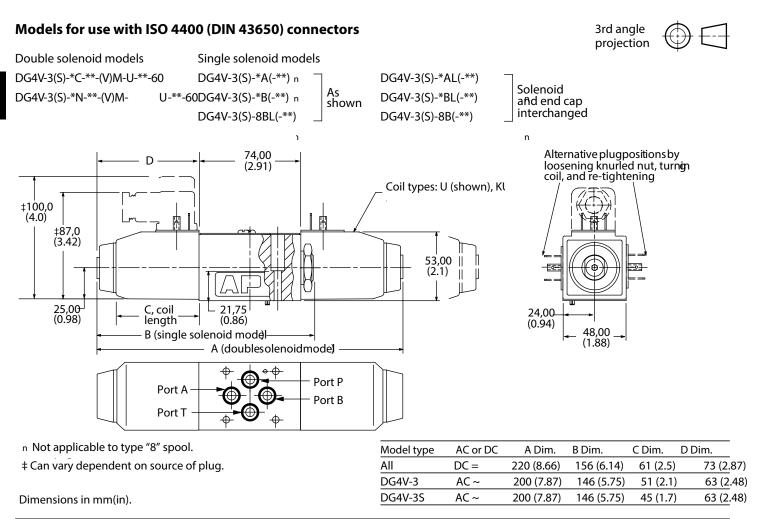

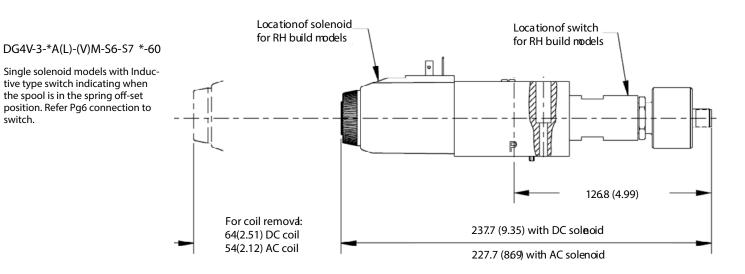


В

switch.

Installation Dimension

Models with "F" type coils (lead wires) and conduit box.

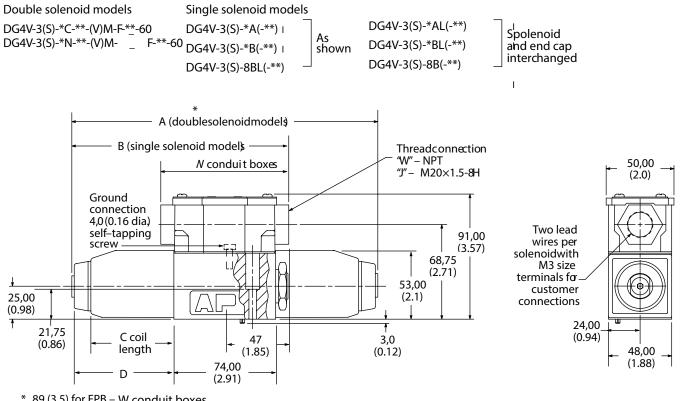

* 89 (3.5) for FPB – W conduit boxes 104(4.0) All plugin conduit boxes

Dimensions in mm(in).


Model type	AC or DC	A Dim.	B Dim.	C Dim.	D Dim.
All	DC =	220 (8.66)	156,5 (6.14)	61 (2.5)	73 (2.87)
DG4V-3	AC ~	200 (7.87)	146,5 (5.75)	51 (2.1)	63 (2.48)
DG4V-3S	AC ~	200 (7.87)	146,5 (5.75)	45 (1.7)	63 (2.48)

Codes W": 2 lead wires for each solenoid, approximately 150,00 (6.00) long. M3 (#6) terminals provided for customer connection.

Codes TW": Valve supplied with lead wires connected into terminal strip suitable for M3 (#6) terminals for customer connection.

Installation Dimension


M12 Connector type

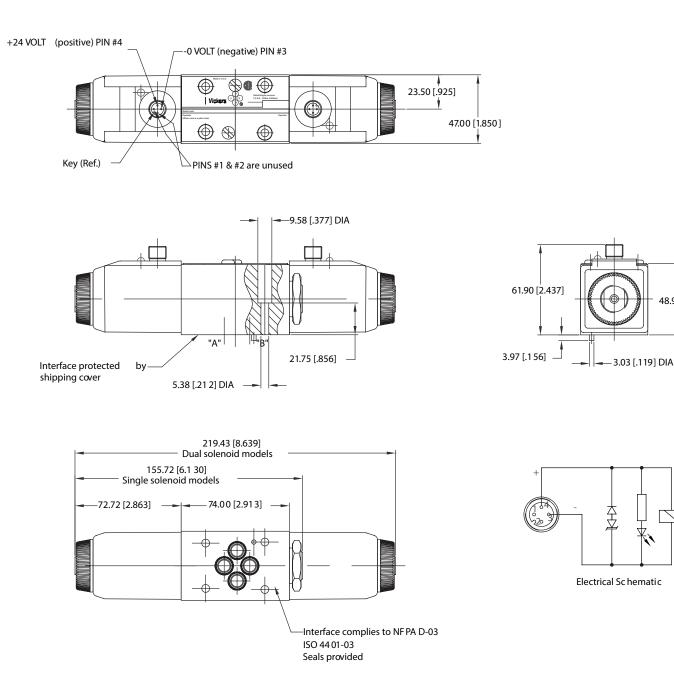

48.91 [1

.926]

Electrical Plugs and Connectors

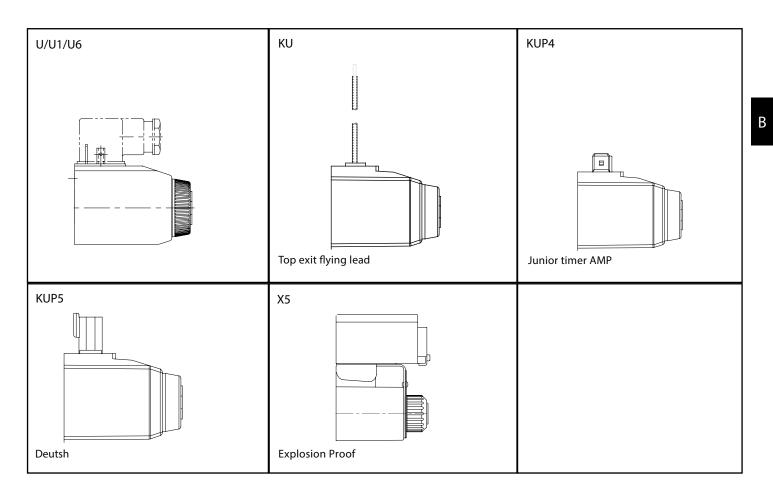

DIN 43650 Connector

Cable diameter range: Ø6–10 mm (0.24–0.40 in)

Wire section range: Ø,5–1,5 mm2 (0.0008–0.0023 in2)

Terminals: Screw type


Type of protection: IEC144 class IP65, when plugs are fitted correctly to the valves with interface seals (supplied with plugs) in place.


Connector can be positioned at 90° intervals on valve by reassembling contact holder into appropriate position inside connector housing.

Connectors with and without indicator lights are available (order separately).

KUP 7


Packard connector pins - Male

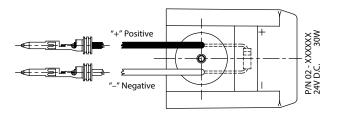






Special packard connector pins with seals - Female

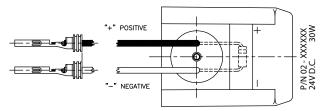

22,5 (0.88)

Electrical Plugs and Connectors

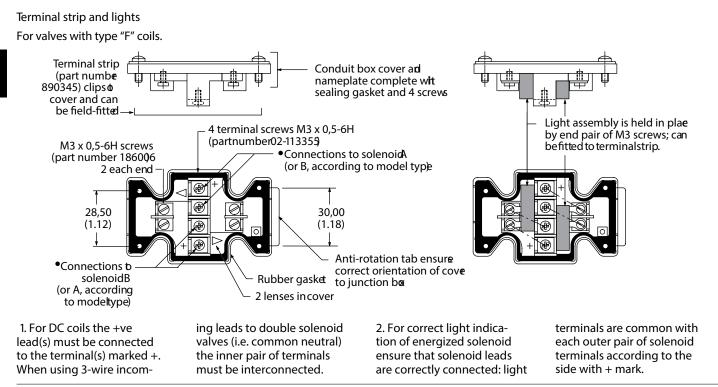

plug is inside a wire housing

Captive thumb screws, when

housing to be pulled clear of

loosened, permit the wire

the valve for disconnect. A longer ground post provides first make/last break ground


with external terminals for machine wire connections.

Insta-Plug

DG4V-3(S)---FPA---60 DG4V-3(S)---FPBW---60

Danfoss 2-part "Insta-Plug" eliminates breaking electrical inputs for valve disconnect. A male half is pre-wired to the valve body. The mating

PA configuration

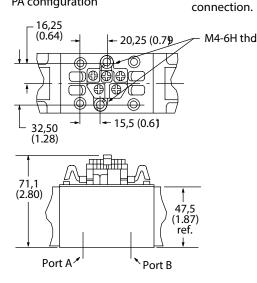

Dimensions in mm(in).


Electrical Plugs and Connectors

NFPA ConnectorT3.5.29-1980

DG4V-3(S)-F<u>PA3W(L</u>)-**-60 DG4V-3(S)-F<u>PA5W(L</u>)-**-60

The receptacle is a standard three or five pole connector with shortened leads and terminals added. The five pole plug has four leads 101,6 (4.0) long and one 177,8 (7.0) long. The three pole plug has two leads 101,6 (4.0) long and one 177,8 (7.0). All wires have underwriters recognized non-solder insulated eyelet terminals. The green wire is used for the ground (earth) connection (No. 8 screw furnished). Valves are supplied pre-wired.


Connection details and model type/model code references

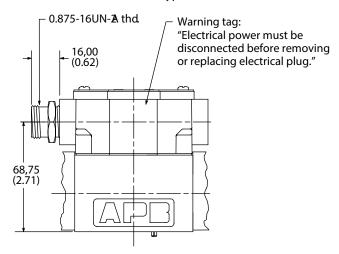

3 pin connector Use with single solenoid valve

Key model code designations: DG4V-3(S)-*A<u>(L)(-**)-(V)M-FPA3W(L)</u> DG4V-3(S)-*B<u>(L)(-**)-(V)M-FPA3W(L)</u>


─ 1 – greenlead (ground)



5 pin connector Use with single solenoid valve


Key model code designations: DG4V-3(S)-*A(L)(-**)-(V)M-<u>FPA5W(L)</u> DG4V-3(S)-*B(L)(-**)-(V)M-

<u>FPA5W(L)</u>




Surge Suppression Devices (For DC Valves) Standard diode (D1), (D2) Diode in parallel with coil, positive bias. When switch (S1) is opened, the energy stored in the coil is trapped and dissipated by the diode (D1), (D2).

- Works only with DC voltage
- Polarity dependent
- Increase drop out time



Surge Suppression Devices (For DC Valves) Standard diode (D2) Diode in parallel with coil, negative bias. When switch (S1) is opened, the energy stored in the coil is trapped and dissipated by the diode (D2).


- Works only with DC voltage
- Polarity dependent
- Increase drop out time



Transzorb (D7)

Diode and Zener diode in parallel with coil. When switch (S1) is opened, the energy stored in the coil is trapped and dissipated by the diode (D1) and Zener diode (Z1) and the coil resistance.

- The Zener makes exact limitation of inductive spikes.
- Works only with DC voltage
- Polarity dependent



NOTE: These surge suppression devices are "Polarity Dependent." Proper biasing conditions must be met when installing/connecting a coil in a system. Times represent cessation/application of voltage to coil versus velocity (start/stop) of a cylinder using a single solenoid, spring offset valve (time in milliseconds). Valve Shift and Dropout Times with and without Surge Suppression

Shift	Dr opout		
CETOP 3			
Do Diode	23	60	
Diode Alone	23	131	
Diode/Zener	23	78	



Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1[®] controllers
- PLUS+1[®] displays
- PLUS+1[®] joysticks and pedals
- PLUS+1[®] operator interfaces
- PLUS+1[®] sensors
- PLUS+1[®] software
- PLUS+1[®] software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss www.daikin-sauer-danfoss.com **Danfoss Power Solutions** is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Danfoss Power Solutions (US) Company 2800 East 13th Street Ames, IA 50010, USA Phone: +1 515 239 6000 Danfoss Power Solutions GmbH & Co. OHG Krokamp 35 D-24539 Neumünster, Germany Phone: +49 4321 871 0 Danfoss Power Solutions ApS Nordborgvej 81 DK-6430 Nordborg, Denmark Phone: +45 7488 2222 Danfoss Power Solutions Trading (Shanghai) Co., Ltd. Building #22, No. 1000 Jin Hai Rd Jin Qiao, Pudong New District Shanghai, China 201206 Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.